

Filterless Control Cabinet Air Conditioner KG 4266-230V



NEMA 4x covers for this cooling units can be found [here](#).

Product Description

Brand name:	SoliTherm SlimLine
Order Number:	42660001
Colour:	RAL 7035
Protection category IP (IEC 60 529):	External circuit: IP 24 Internal circuit: IP 54
Add-ons:	Stainless steel housing, part no. 4266002
Approvals:	CE / cURus
Customs tariff number:	84158200
Material housing:	Mild steel, powder coated

Technical data KG 4266-230V

Cooling capacity / output L35L35:	320 W @ 50 Hz
	330 W @ 60 Hz
Cooling capacity / output L35L50:	140 W @ 50 Hz
	150 W @ 60 Hz
Compressor:	Rotary piston compressor
Refrigerant:	R134a
Refrigerant charge:	96g
Operating temperature range:	+20°C - +50°C
Max. air volume flow:	Ambient air circuit: 170 m ³ /h
	Cabinet air circuit: 125 m ³ /h
Mounting:	Internal / External
Dimensions (H x W x D):	520 x 270 x 110 mm
Weight:	13 kg
Cut out dimensions:	501 x 251 mm
Rated operating voltage / frequency:	230 V - 50/60 Hz ~N
Rated current L35L35:	1.5 A @ 50 Hz
	1.6 A @ 60 Hz
Starting current:	3.2 A
Max. current:	1.8 A
Power consumption L35L35:	315 W @ 50 Hz
	335 W @ 60 Hz
Max. power consumption:	375 W
Fuse rating:	6 A (T)
Connection:	Connection terminal block

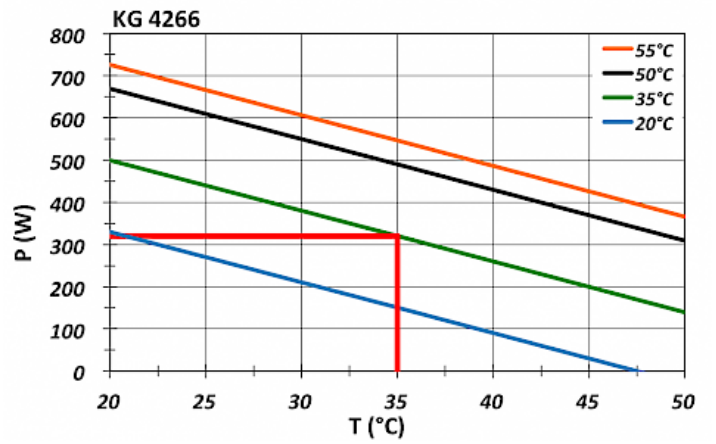
Click the graphics to download the originals.

More CAD graphics can be found on our [Products Downloads page](#).

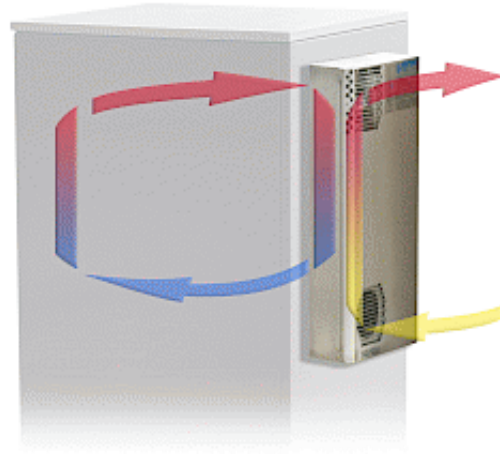
> [Overview product group Cabinet cooling units - SlimLine](#)

Performance Graph:

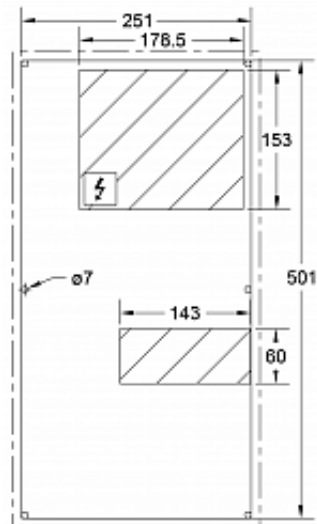
T = Ambient temperature
 P = Cooling capacity



click image to enlarge

Airflow diagram:


click image to enlarge

Cutout diagram:


click image to enlarge

[Datasheet](#) created 27.04.2015 (15:20:40). Technical rights reserved.