

Outdoor Air Conditioner OC 5709-400V



Product Description

Brand name:	SoliTherm ComPact Outdoor
Order Number:	570920001
Colour:	RAL 7035
Protection category IP (IEC 60 529):	IP 56 (NEMA 12,3, 3R, 4)
Approvals:	CE
Customs tariff number:	84158200
Material housing:	Mild steel, powder coated

Technical data OC 5709-400V

Cooling capacity / output L35L35:	850 W @ 50 Hz
	880 W @ 60 Hz
Cooling capacity / output L35L50:	610 W @ 50 Hz
	660 W @ 60 Hz
Heating capacity:	400 W (optional)
Compressor:	Reciprocating compressor
Refrigerant:	R134a
Refrigerant charge:	280 g
Operating temperature range:	-20°C - +55°C
Max. air volume flow:	Ambient air circuit: 315 m ³ /h
	Cabinet air circuit: 165 m ³ /h
Mounting:	External
Dimensions (H x W x D):	830 x 315 x 270 mm
Weight:	37 kg
Rated operating voltage / frequency:	400/460 V - 50/60 Hz 2~
Rated current L35L35:	2.0 A @ 400 V
	1.8 A @ 460 V
Starting current:	5.1 A
Max. current:	2.6 A @ 400 V
	2.3 A @ 460 V
Power consumption L35L35:	620 W @ 400/460 V - 50 Hz
	630 W @ 400/460 V - 60 Hz
Max. power consumption:	870 W
Fuse rating:	2 x 3 A (T)
Connection:	Connection terminal block


Click the graphics to download the originals.

More CAD graphics can be found on our [Products Downloads page](#).

> [Overview product group Cooling units - Outdoor](#)


Performance Graph:

T = Ambient temperatur
P = Cooling capacity

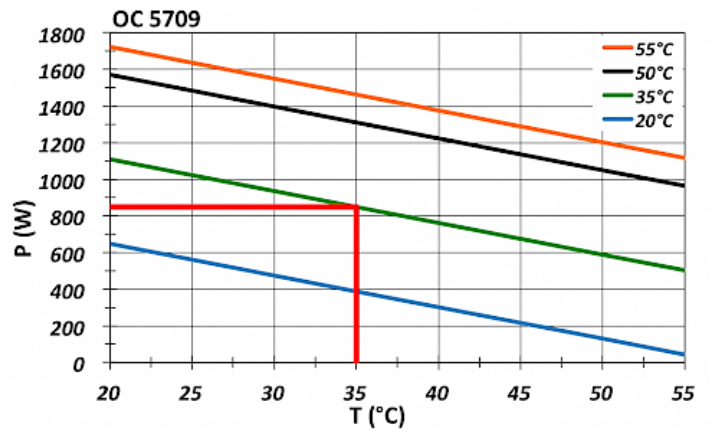

click image to enlarge

Cutout diagram:

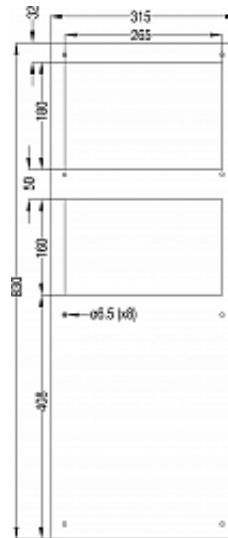

click image to enlarge

[Datasheet](#) created 27.04.2015 (15:11:48). Technical rights reserved.