

Outdoor Air Conditioner OC 5720-230V



Product Description

Brand name:	SoliTherm ComPact Outdoor
Order Number:	572000001
Colour:	RAL 7035
Protection category IP (IEC 60 529):	IP 56 (NEMA 12, 3, 3R, 4)
Approvals:	CE
Customs tariff number:	84158200
Material housing:	Mild steel, powder coated

Technical data OC 5720-230V

Cooling capacity / output L35L35:	2 kW @ 50 Hz
	2 kW @ 60 Hz
Cooling capacity / output L35L50:	1.60 kW @ 50 Hz
	1.65 kW @ 60 Hz
Heating capacity:	1,000 W (optional)
Compressor:	Reciprocating compressor
Refrigerant:	R134a
Refrigerant charge:	480 g
Operating temperature range:	-20°C - +55°C
Max. air volume flow:	Ambient air circuit: 655 m ³ /h
	Cabinet air circuit: 400 m ³ /h
Mounting:	External
Dimensions (H x W x D):	1,150 x 395 x 270 mm
Weight:	49 kg
Rated operating voltage / frequency:	230 V - 50/60 Hz
Rated current L35L35:	5.5 A @ 50 Hz
	6.5 A @ 60 Hz
Starting current:	22.3 A
Max. current:	9.4 A
Power consumption L35L35:	1,17 kW @ 50 Hz
	1,41 kW @ 60 Hz
Max. power consumption:	1,65 kW @ 50 Hz
	2,1 kW @ 60 Hz
Fuse rating:	10 A (T)
Connection:	Connection terminal block


Click the graphics to download the originals.

More CAD graphics can be found on our [Products Downloads page](#).

> [Overview product group Cooling units - Outdoor](#)


Performance Graph:

T = Ambient temperatur
P = Cooling capacity

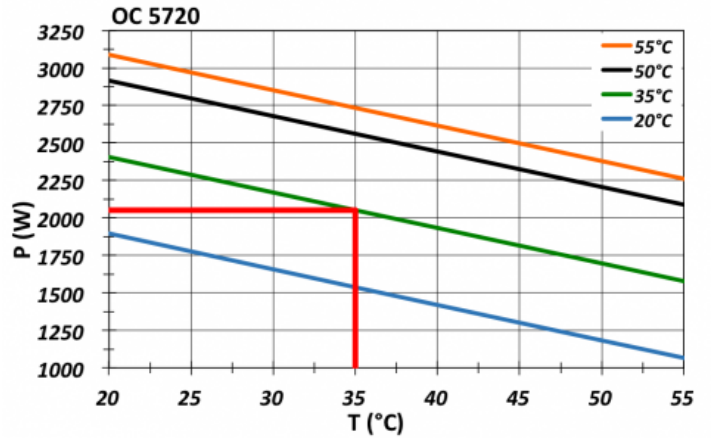

click image to enlarge

Cutout diagram:

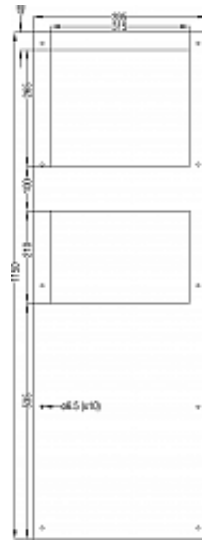

click image to enlarge

[Datasheet](#) created 27.04.2015 (15:11:57). Technical rights reserved.